





* Model OVL-IL

OVL
SERIES

Automatic **overlap sealers**

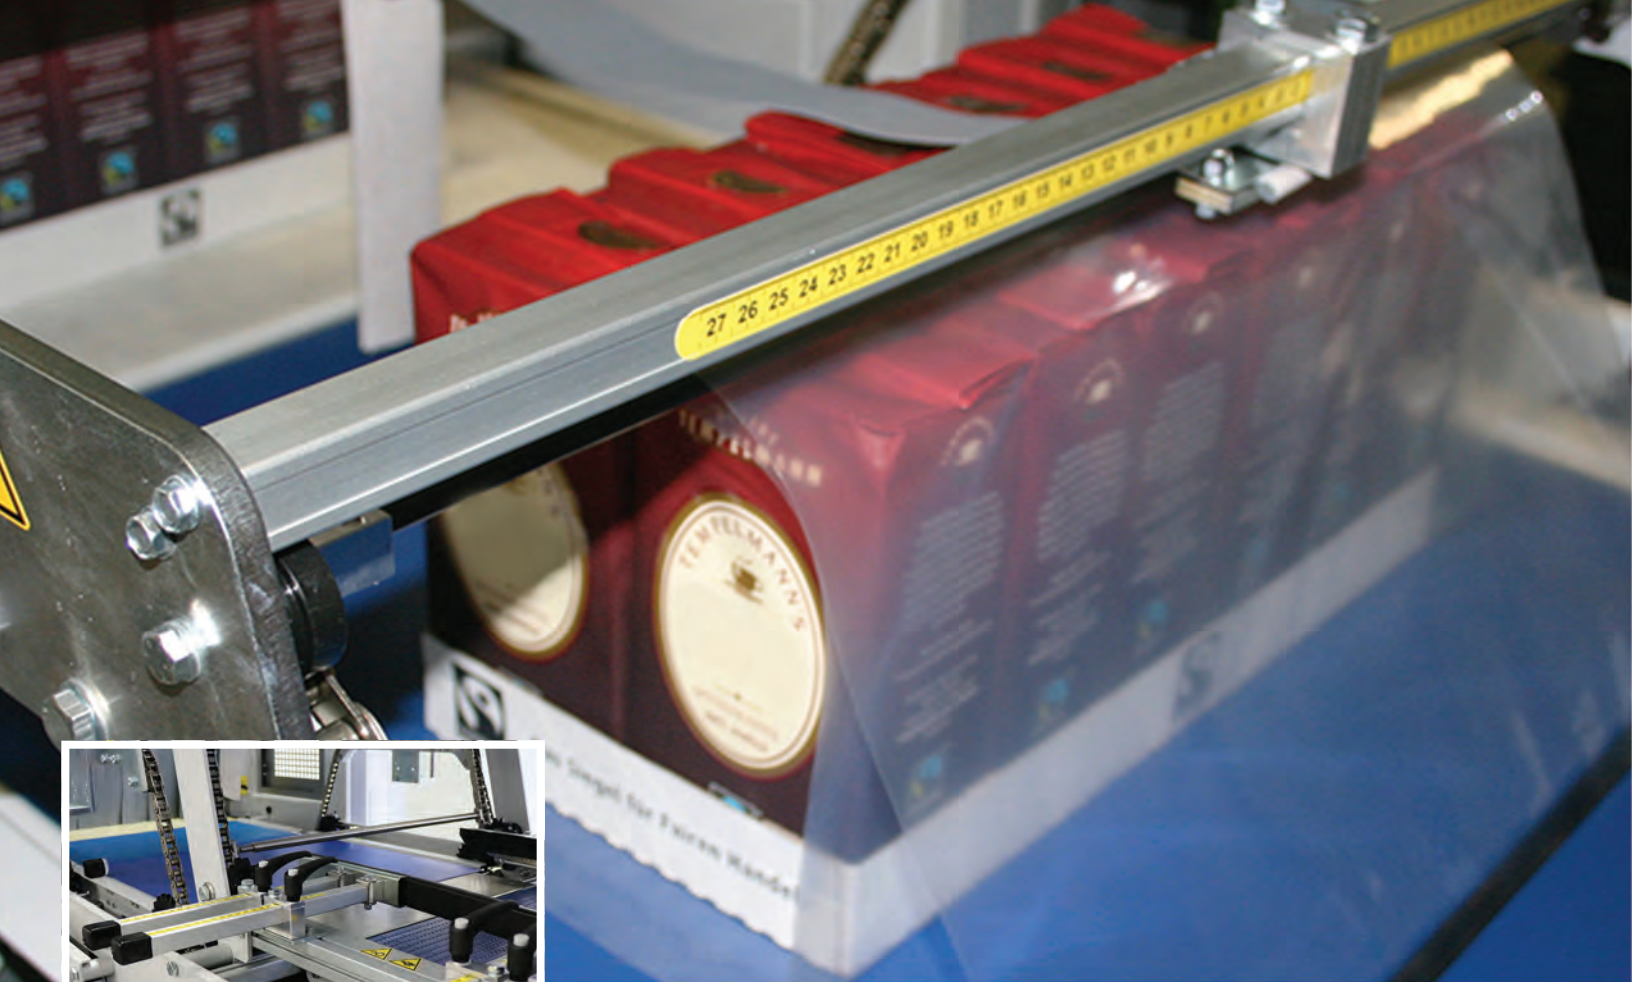

* Model OVL-SA



General features

- ▶ Automatic overlap shrink wrapper with in-line feed conveyor
- ▶ Double-chamber tunnel
- ▶ Photocells for film wrapping, tunnel obstruction and outlet accumulation included
- ▶ Film unwinding controlled by brush-less servomotor
- ▶ Pack wrapping controlled by brush-less servomotor
- ▶ Auto-configuration of separation and wrapping of the pack

Perfect solution for center printed PE films

The mono-block automatic overlap shrink wrappers are extremely versatile: they can pack various products, such as glass and PET bottles, cans, boxes, trays, jars, cartons of different sizes in a wide range of pack collations.

They can be used in several industry segments, such as beverages, food, chemicals, wine and spirits, cosmetics, detergents etc.



* Model OVL-RA



* Model OVL-IL-T

Technical features


Specifications

	OVL-SA	OVL-RA	OVL-RA-T	OVL-RA-P	OVL-IL	OVL-IL-T	OVL-IL-P
Power supply	220/240V 3PH 50/60 Hz	220/240V 3PH 50/60 Hz	220/240V 3PH 50/60 Hz	220/240V 3PH 50/60 Hz	220/240V 3PH 50/60 Hz	220/240V 3PH 50/60 Hz	220/240V 3PH 50/60 Hz
Output	Up to 25 ppm	Up to 25 ppm	Up to 25 ppm	Up to 25 ppm	Up to 25 ppm	Up to 25 ppm	Up to 25 ppm
Infeed belt width	21.25"	21.25"	21.25"	21.25"	21.25"	21.25"	21.25"
Maximum height product	14.75"	14.75"	14.75"	14.75"	14.75"	14.75"	14.75"
Maximum film reel	25.5"	25.5"	25.5"	25.5"	25.5"	25.5"	25.5"
Dual machine		✓			✓		
Multi-lane					✓	✓	✓
Printed film	✓	✓	✓	✓	✓	✓	✓
Stainless steel version	✓	✓	✓	✓	✓	✓	✓

Dimensions

PAD DIMENSIONS	Min	Max
A	5.5"	13.75"
B	7.75"	19.5"
Thickness	0.098"	0.138"

TRAY DIMENSIONS	Min	Max
A	5.75"	15.75"
B	7.75"	23.5"
C	5.75"	19.5"
D	2.25"	12.5"
H	5.5"	13.75"
Thickness	1.15"	3.15"

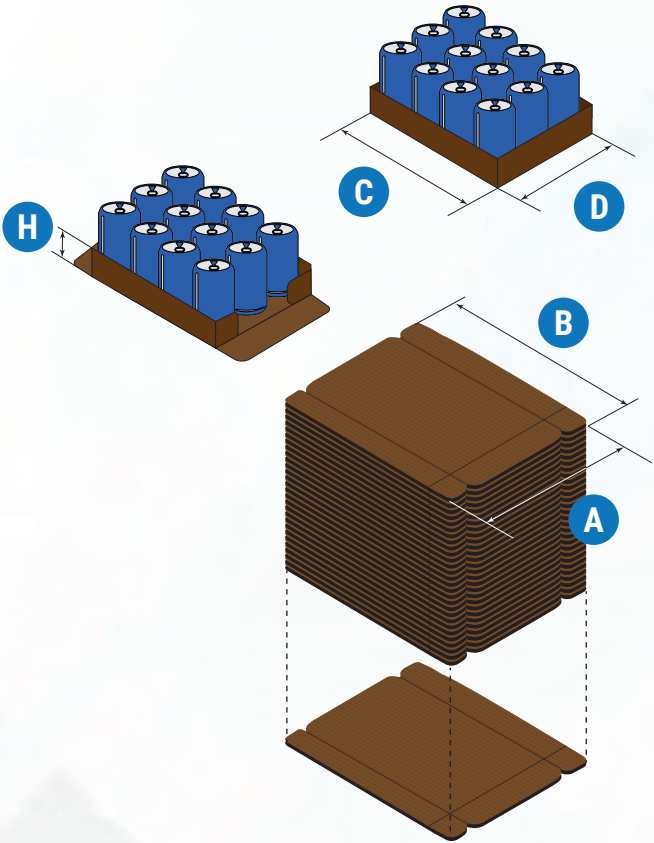

Many models available :

- ▶ Hand fed
- ▶ Pad insertion
- ▶ Inline pack collation
- ▶ Tray insertion
- ▶ 90-degree pack collation

“ Up to 25 packs/minute ”