

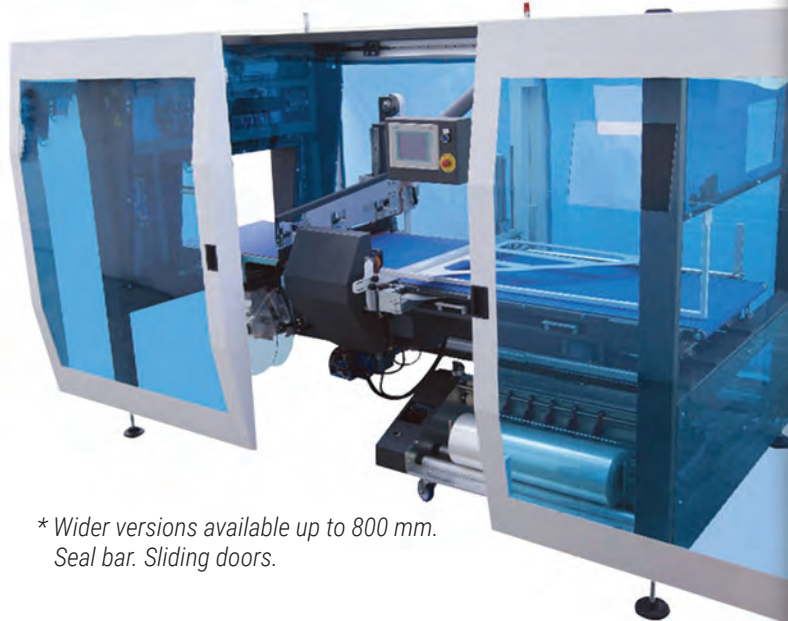
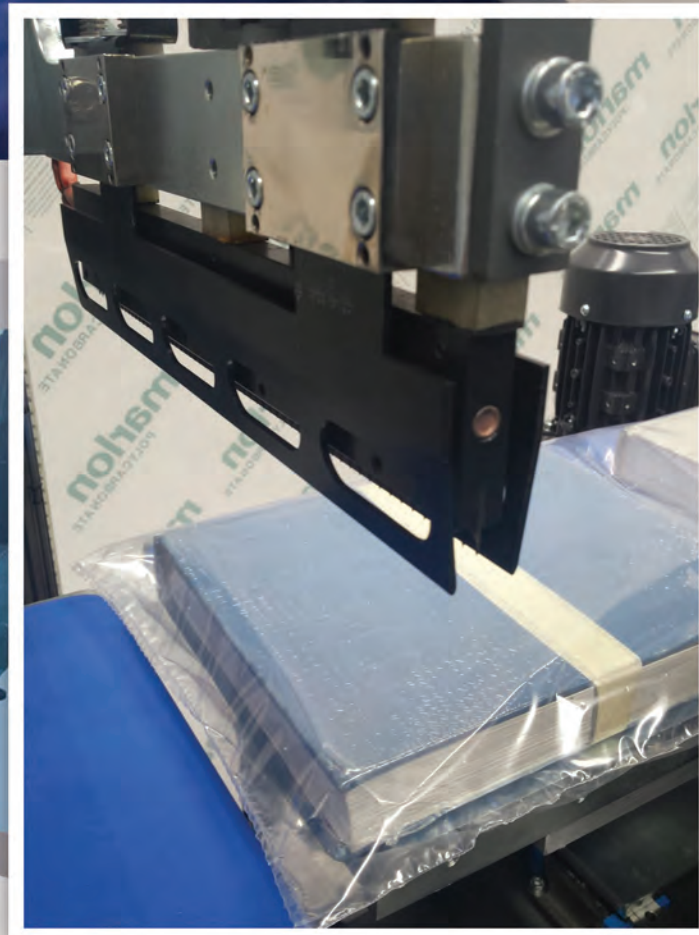


STR
SERIES

Automatic **shrink side sealer**

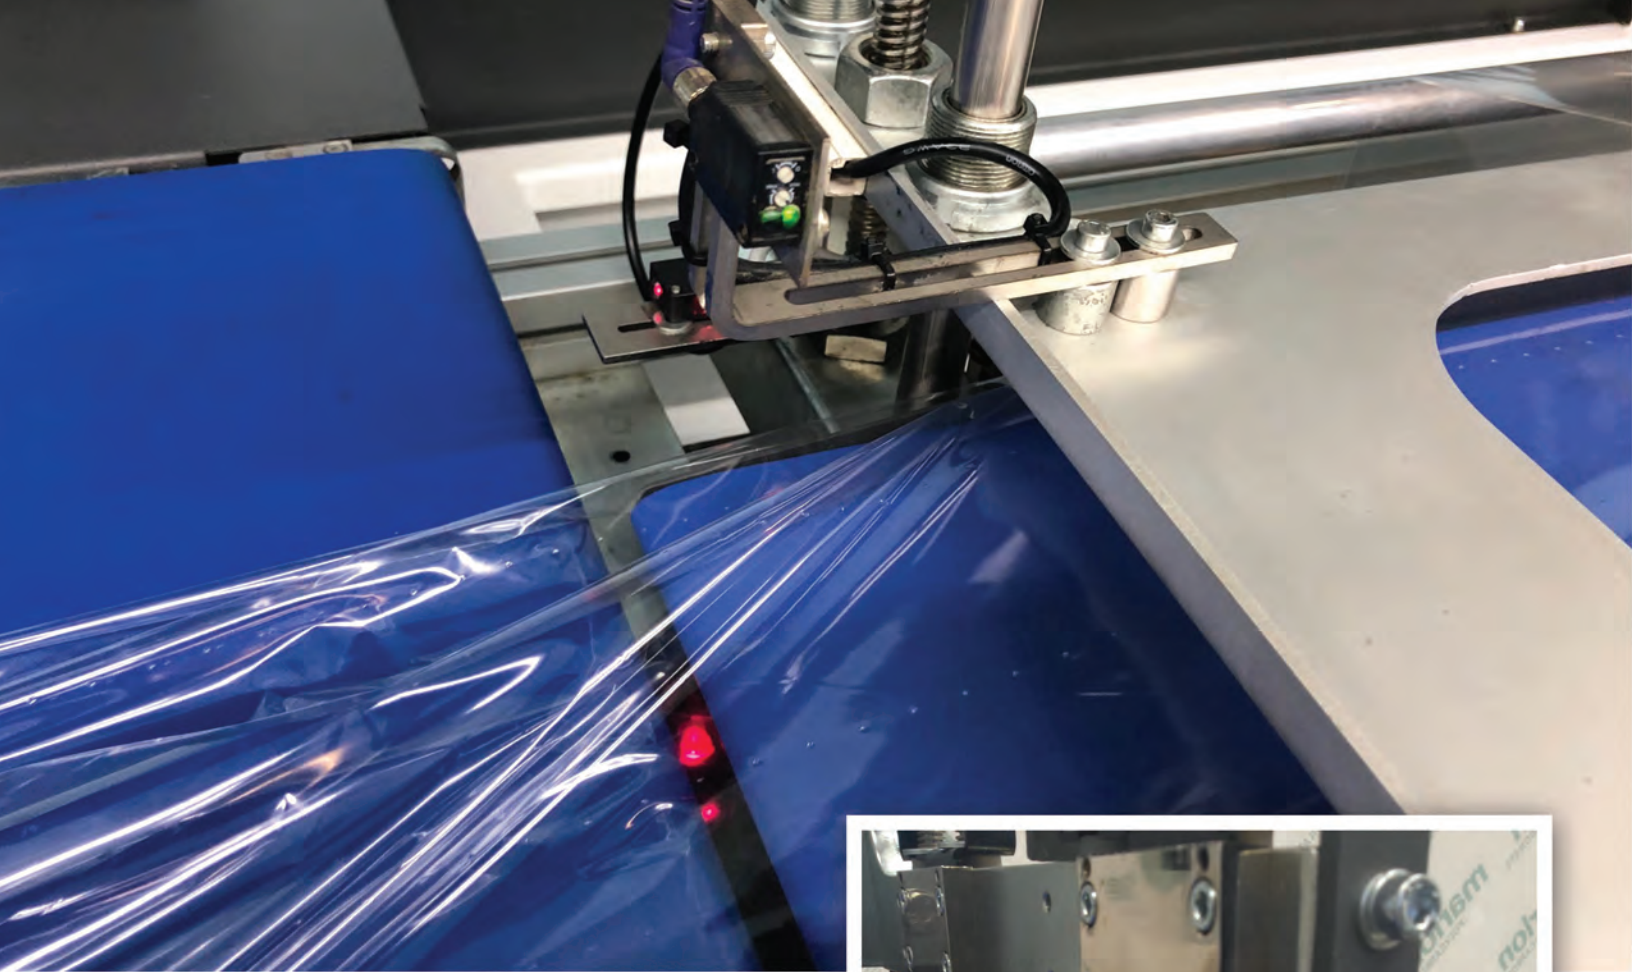

* Wider versions available up to 800 mm.
Seal bar. Sliding doors.



shrink wrapping

General features

- ▶ 3 belts side sealing machine
- ▶ High flexibility
- ▶ Film saving
- ▶ Energy saving for a tight bag
- ▶ Canter level structure that allows easy cleaning and accessibility of the machine
- ▶ Available in stainless steel version
- ▶ Combo unit with heat tunnel available
- ▶ Capable to work with different sealing systems with all kinds of film: POF, PE, BOPP, OPP, CAST, center folded, and flat film
- ▶ Clear & pre-printed film
- ▶ Intermittent and box motion (depending on output capacity)
- ▶ Possibility to create a customized machine adding desired options from optional lists.

Innovative 3-belt side sealer packaging machine

New generation and design, side sealing packaging machine, super-accessible and simple to use.

Excellent for packaging and total closure of various types of products with heat shrinking or other film, center-folded or flat film.

Great flexibility of the machine, thanks to the possibility of having it in various sizes with a fixed, intermittent or box motion bar.

Key options


- ▶ Large/fine seal
 - ▶ Top seal
 - ▶ Bottom seal
 - ▶ BOPP film
 - ▶ POF film
 - ▶ PE film
 - ▶ MAP with Hermetic Seal and Gas Injection
 - ▶ Vacuum chamber
- ▶ Flat film
 - ▶ Double film dispenser unit
 - ▶ Automatic splicer
 - ▶ Pre-printed film
 - ▶ Sheet applicator
 - ▶ Labeler
 - ▶ Stainless steel upgrade
 - ▶ Wash-down upgrade



Box motion sealer



Box motion sealer

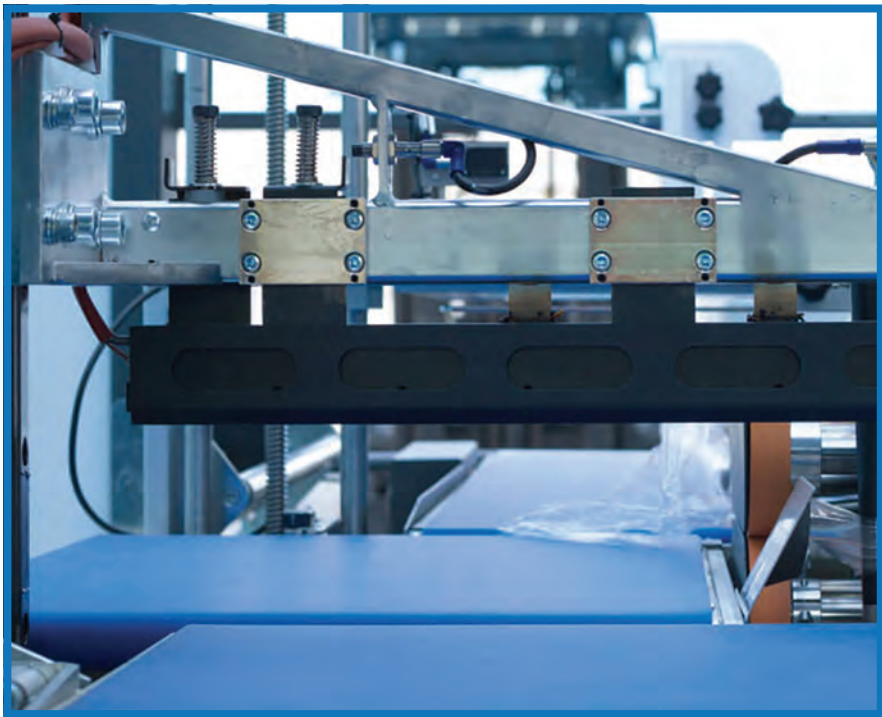

Movable center conveyor belt

Technical features



Models	300 C	500 C	600 C
Type	Combo unit with heat tunnel	Combo unit with heat tunnel	Combo unit with heat tunnel
Sealing dimensions	11.5"	19.5"	23.5"
Max. production width	7.75"	15.75"	19.5"
Max. product length	Unlimited	Unlimited	Unlimited
Max. product height	11.75"	11.75"	11.75"
Film width (CF)	17.5"	25.5"	29.5"
Reel diameter	13.75"	13.75"	13.75"
Working height	~ 35"	~ 35"	~ 35"
Speed - intermittent	Up to 65 ppm	Up to 65 ppm	Up to 65 ppm
Speed - box motion	N/A	N/A	N/A
Dimenions (L x W x H)	135.75" x 41.5" x 76.5"	135.75" x 50" x 76.5"	135.75" x 53" x 76.5"

Models	500	600	800
Type	Sealer only	Sealer only	Sealer only
Sealing dimensions	19.5"	23.5"	31.5"
Max. production width	15.75"	19.5"	27.5"
Max. product length	Unlimited	Unlimited	Unlimited
Max. product height	11.75"	11.75"	11.75"
Film width (CF)	25.5"	29.5"	37.5"
Reel diameter	13.75"	13.75"	13.75"
Working height	~ 35"	~ 35"	~ 35"
Speed - intermittent	Up to 65 ppm	Up to 65 ppm	Up to 40 ppm
Speed - box motion	Up to 100 ppm	Up to 100 ppm	Up to 70 ppm
Dimenions (L x W x H)	91.5" x 50" x 76.5"	91.5" x 53" x 76.5"	131" x 72.5" x 76.5"

“
For an **easy, flexible and efficient**
way to shrink wrap.